




# SlowStop® Rebounding Rack Protector—4” (SS4Y-15-HS-xxx)

90° IMPACT PROTECTION

MASS (LBS)	SPEED (MPH)
1,000	10.8
3,000	6.3
5,000	4.8
10,000	3.4

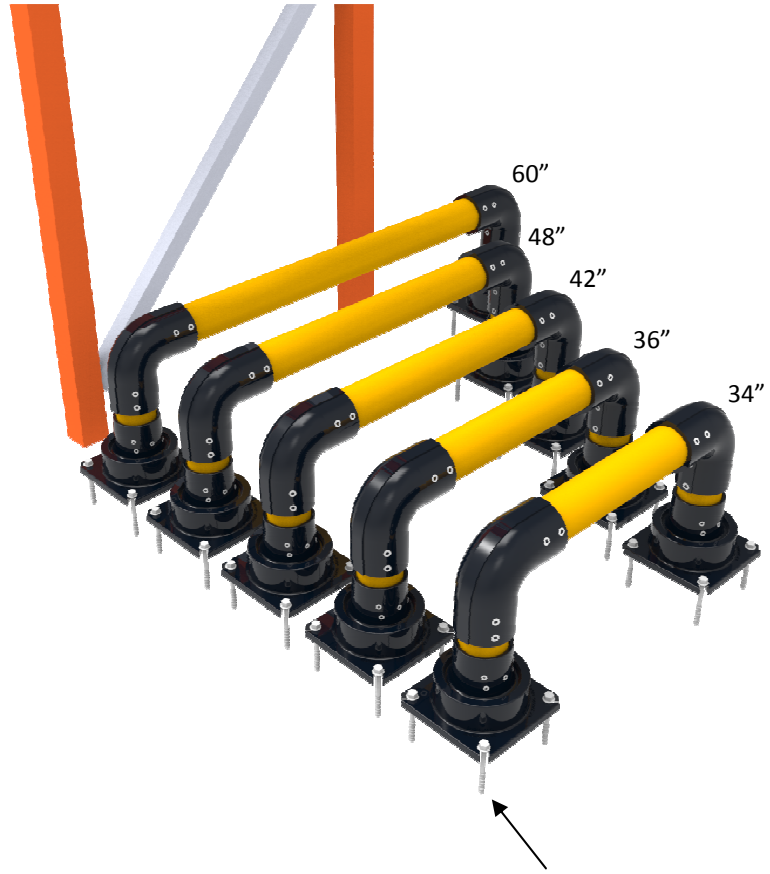

Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base

Diameter: 4” (3.5” Schedule 40 Steel)

Height: 15” to Centerline (17” Overall)

Width: 34” SS4Y-15-HS-30  
 36” SS4Y-15-HS-32  
 42” SS4Y-15-HS-38  
 48” SS4Y-15-HS-44  
 60” SS4Y-15-HS-56

Max Tilt: 4”

Installs with eight (8) Concrete Anchor Screws

**SPECIFICATIONS**

- Energy Absorption: 5,334 joules
- Temperature Rating: -40°
- Pipe Coating: Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat

**RECOMMENDED USES**

- Pallet and Storage Rack Ends
- Standard 5,000 Pound Fork Lifts
- Concrete Floors
- Warehouses and Manufacturing Facilities

