




SlowStop® Rebounding Bollard – 4” (SS4Y-42)

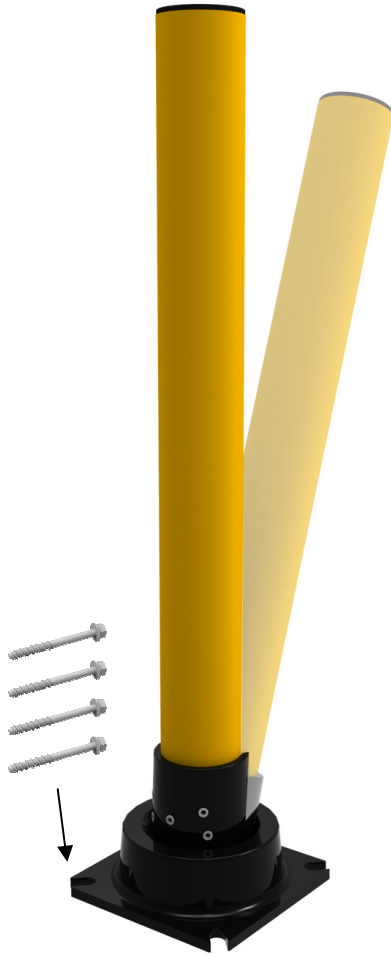


Installs with four (4) 5/8” x 5-1/2”
Concrete Screw Anchors

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4” (3.5” ANSI Schedule 40)
Height: 42”

Set Screws: 5 M16 x 2.00
8mm Hex

Cap: Black Plastic

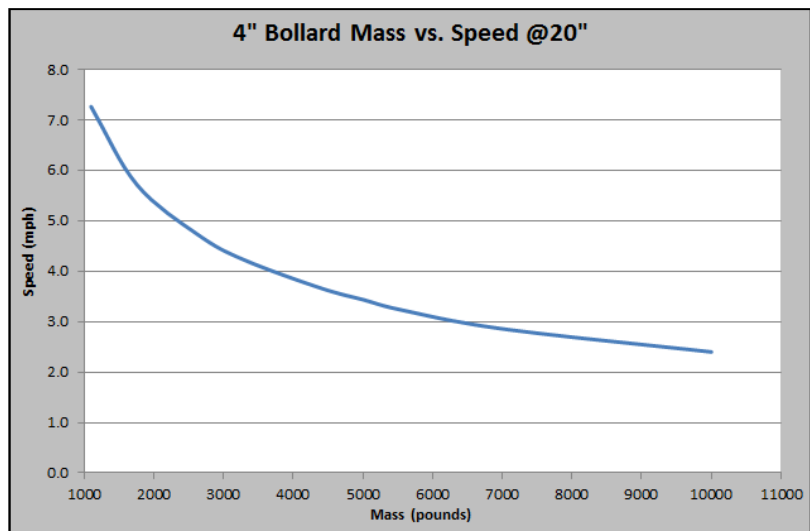

SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating plus Powder Coat C5I Rated.

RECOMMENDED USES

- Medium Duty
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use