



SlowStop® IronFlex Column Protectors

Four SlowStop® Rebounding Bollards interconnected to modular elbows to form the strongest steel rebounding bollard column protector available.

Available in 3", 4", 5" and 6" Bollards to suit the application.

Color: Yellow Bollard on Black Bases

Height: Typical 24" - 30"


Temp. Rating: -40°

Pipe Coating: 150µm Polyester Outdoor Powder Coat

Base Coating: Environmentally Friendly Water-Based KTL Coating.

Ratings:

3"	6,480 Joules	@ Max. 33" Width
4"	10,668 Joules	@ 40" Width
5"	28,000 Joules	@ 40" Width
6"	51,600 Joules	@ 40" Width

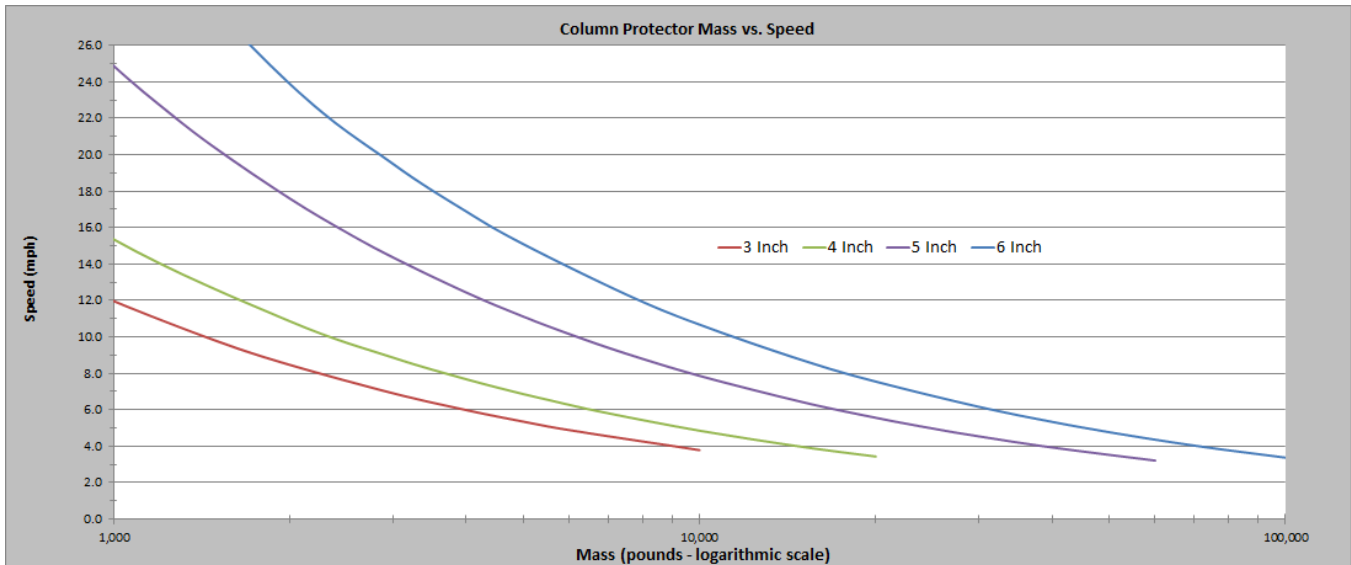

4955 Stout Dr. • San Antonio, TX 78219
 210-736-4477 • 800-736-5256 • Fax 210-734-6448
 Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
 ©2017 SlowStop. All rights reserved. 01/19/2017