



SlowStop® Rebounding Bollard – 3” (SS3Y-42)

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base


Diameter: 2.88” (2.5” ANSI Schedule 40 or Equiv.)
Height: 42”

Set Screws: 5 M12 x 1.75
6mm Hex

Cap: Black Plastic

MASS (LBS)	2000	3000	4000	5000	6000	7000	8000	9000	10000
SPEED (MPH)									
1.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
1.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
2.0	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
2.5	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow
3.0	Green	Green	Yellow	Yellow	Yellow	Yellow	Red	Red	Red
3.5	Green	Yellow	Yellow	Yellow	Red	Red	Red	Red	Red
4.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
4.5	Yellow	Yellow	Red	Red	Red	Red	Red	Red	Red
5.0	Yellow	Red	Red	Red	Red	Red	Red	Red	Red
5.5	Yellow	Red	Red	Red	Red	Red	Red	Red	Red
6.0	Red	Red	Red	Red	Red	Red	Red	Red	Red
6.5	Red	Red	Red	Red	Red	Red	Red	Red	Red

Green: No Damage / Negligible Damage
Yellow: Will Stop / Potential Damage to Guard
Red: Guard is under-sized

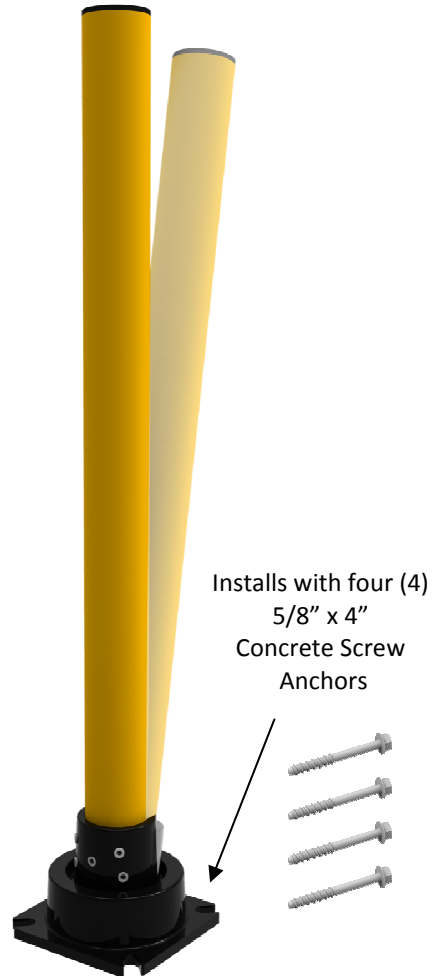

SPECIFICATIONS

- Stopping Power: 3,242 joules / 2,390 ft-lb.
- No Damage Rating: 1,621 joules / 1,195 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized + 60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated.

RECOMMENDED USES

- Light Duty
- Rack Guarding
- Equipment Guarding
- Drive-Thru Lanes
- Utility Protection
- Access Denial
- Post-Tensioned Concrete
- Not for K-Rated Security Use



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved.