



# SlowStop® 3" IronFlex Double Railing (SS3Y-42-DFx-x)

## 4' CENTERS

3,471 Joules (min.) | 4,000# @ 4.4 mph without damage



SS3Y-42-DFL-4




SS3Y-42-DFM-4




SS3Y-42-DFR

## 6' CENTERS

2,829 Joules (min.) | 4,000# @ 3.9 mph

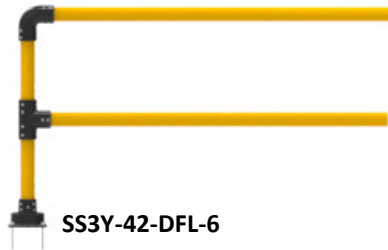

SS3Y-42-DFL-6

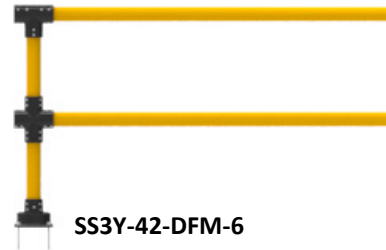


SS3Y-42-DFM-6




SS3Y-42-DFR

## 8' CENTERS

2,507 Joules (min.) | 4,000# @ 3.7 mph

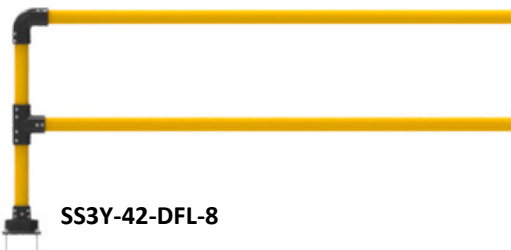

SS3Y-42-DFL-8

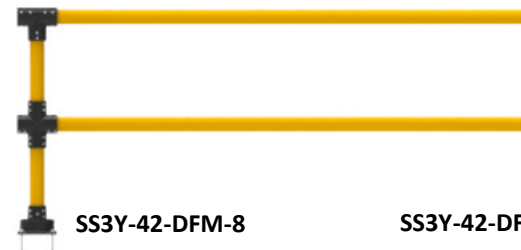

SS3Y-42-DFM-8



SS3Y-42-DFR

- 42" Tall Railing Sections
- Easy connect set screw installation
- Mix and match needed lengths
- Field customizable cut for odd lengths

- Patented Rebounding Steel Construction
- Temperature Rating: -40°F
- Pipe Coating: Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat



4955 Stout Dr. • San Antonio, TX 78219  
210-736-4477 • 800-736-5256 • Fax 210-734-6448  
Email: [info@slowstop.com](mailto:info@slowstop.com)  
[www.slowstop.com](http://www.slowstop.com)



QR: Download Spec Sheets  
©2017 SlowStop. All rights reserved. 01/19/2017