




SlowStop® 3" Modular FlexRail (SS3Y-GRS)



MASS (LBS)	2500	5000	7500	10000	15000	20000	25000	40000	80000
SPEED (MPH)									
1.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
2.0	Green	Green	Green	Green	Green	Green	Green	Green	Yellow
3.0	Green	Green	Green	Green	Green	Green	Green	Yellow	Red
4.0	Green	Green	Green	Green	Green	Yellow	Yellow	Red	Red
5.0	Green	Green	Green	Green	Yellow	Yellow	Red	Red	Red
6.0	Green	Green	Yellow	Yellow	Red	Red	Red	Red	Red
7.0	Green	Green	Yellow	Yellow	Red	Red	Red	Red	Red
8.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
9.0	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
10.0	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
11.0	Yellow	Red	Red	Red	Red	Red	Red	Red	Red
12.0	Yellow	Red	Red	Red	Red	Red	Red	Red	Red

No / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is Under-Sized

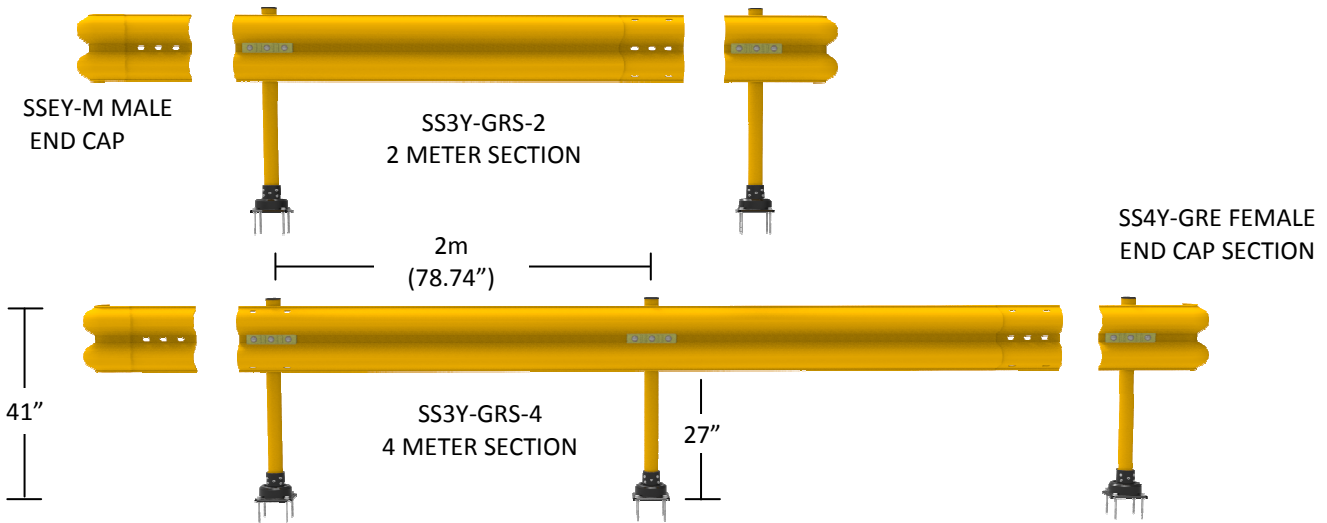

SPECIFICATIONS

- Includes 3" SlowStop Bollards—42" tall
- Rail Break Strength: 24,780 lbf
- Stopping Power Rating 23,700 Joules—Rail Impact
- Max deflection: 28" at break
- Temperature Rating: -40°F to 240°F
- Traffic Yellow (RAL 1023) Throughout
- No bending equipment required for curves (16' min. radius)
- Custom Heights Available

RECOMMENDED USES

- Industrial Equipment Protection
- Pedestrian Aisle Ways
- Utility Guarding
- Access Denial
- Parking Perimeters



4955 Stout Dr. • San Antonio, TX 78219
 210-736-4477 • 800-736-5256 • Fax 210-734-6448
 Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
 ©2017 SlowStop. All rights reserved.