




SlowStop® Rebounding Bollard – 4” (SS4Y-42)

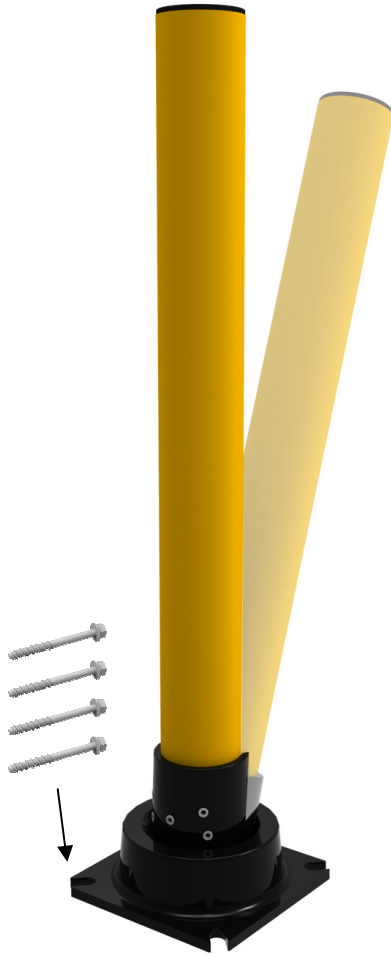

Installs with four (4) 5/8” x 5-1/2”
Concrete Screw Anchors

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4” (3.5” ANSI Schedule 40 or Equiv.)
Height: 42”

Set Screws: 5 M16 x 2.00
8mm Hex

Cap: Black Plastic

MASS (LBS)	1000	2000	3000	4000	5000	7500	10000	12500	15000
SPEED (MPH)									
1.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
1.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
2.0	Green	Green	Green	Green	Green	Green	Green	Green	Yellow
2.5	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow
3.0	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Red
3.5	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red
4.0	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red	Red
4.5	Green	Yellow	Yellow	Yellow	Red	Red	Red	Red	Red
5.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
5.5	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
6.0	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
6.5	Green	Yellow	Red	Red	Red	Red	Red	Red	Red

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized

SPECIFICATIONS

- Stopping Power Rating: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized +
60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated

RECOMMENDED USES

- Medium Duty
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved.