





SlowStop® 4" Handicap Parking Bollard (SS4Y-42-HC)

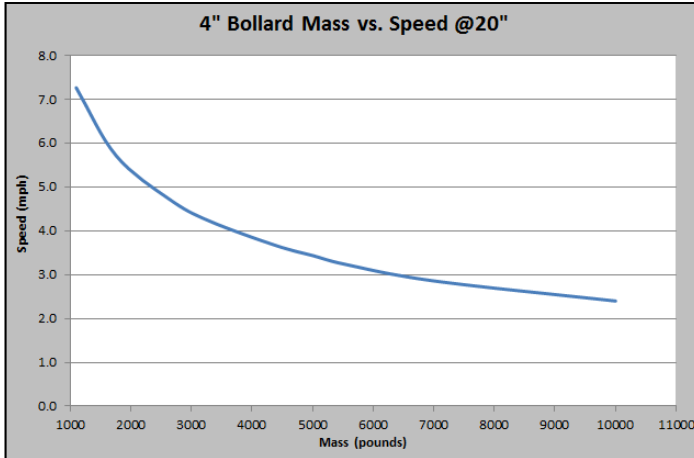

Installs with four (4)
5/8" x 5-1/2"
Concrete Screw Anchors



- Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base
- Diameter: 4" (3.5" ANSI Schedule 40)
- Bollard Height: 42"
- Sign Height: 60" above ground (ADA)
- Set Screws: 5 M16 x 2.00
8mm Hex
- Fill: Foam fill by customer

SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating plus Powder Coat C5I Rated.
- Engineer grade reflective sheeting on HDPE sign face
- Aluminum post and brackets included
- Available with Van Accessible placard (SS4Y-42-VA) or no placard (SS4Y-42-SP)

RECOMMENDED USES

- Parking lot handicap parking spots
- Sign face can be changed for alternate uses
- Post-tensioned Concrete
- For use without costly wheel stops
- Avoiding trip hazards in pedestrian travel lanes



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@impactrecovery.com
www.slowstop.com



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved.