





# SlowStop® 4" Bollard Sign Post (SS4Y-42-SP)

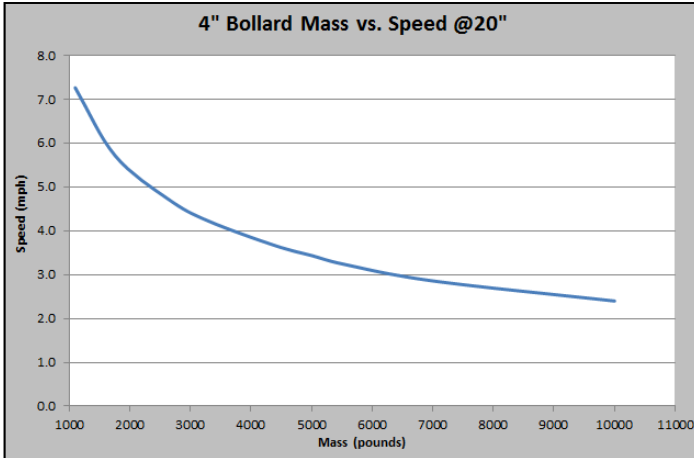

Installs with four (4)  
5/8" x 5-1/2"  
Concrete Anchor Screws



- Color:** RAL 1023 Safety Yellow Bollard  
RAL 9005 Black Base
- Diameter:** 4" (3.5" ANSI Schedule 40)
- Bollard Height:** 42"
- Sign Height:** 60" above ground (ADA) for 12" x 18" sign placard
- Set Screws:** 5 M16 x 2.00  
8mm Hex
- Fill:** Foam fill by customer

### SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating plus Powder Coat C5I Rated.
- Aluminum post and brackets included
- Available with sign placards.

### RECOMMENDED USES

- Parking Lot Handicap Parking Spots
- Reserved Parking Spaces
- Sign face can be added for a variety of uses
- Post-tensioned Concrete
- For use without costly wheel stops
- Avoid trip hazards in pedestrian travel lanes



4955 Stout Dr. • San Antonio, TX 78219  
210-736-4477 • 800-736-5256 • Fax 210-734-6448  
Email: [info@impactrecovery.com](mailto:info@impactrecovery.com)  
[www.slowstop.com](http://www.slowstop.com)



QR: Download Spec Sheets  
©2017 SlowStop. All rights reserved.