



SlowStop® 4" IronFlex Double Railing (SS4Y-DFx-x)

4' CENTERS

4,890 Joules (min.) | 5,000# @ 4.6 mph without damage



SS4Y-42-DFL-4




SS4Y-42-DFM-4




SS4Y-42-DFR

6' CENTERS

4,149 Joules (min.) | 5,000# @ 4.3 mph

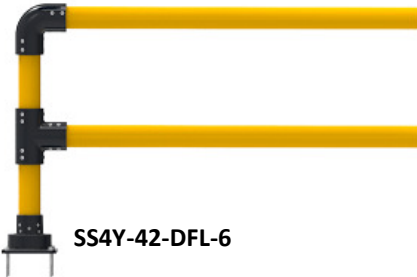

SS4Y-42-DFL-6

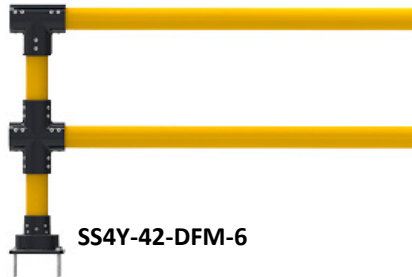


SS4Y-42-DFM-6




SS4Y-42-DFR

8' CENTERS

3,778 Joules (min.) | 5,000# @ 4.1 mph

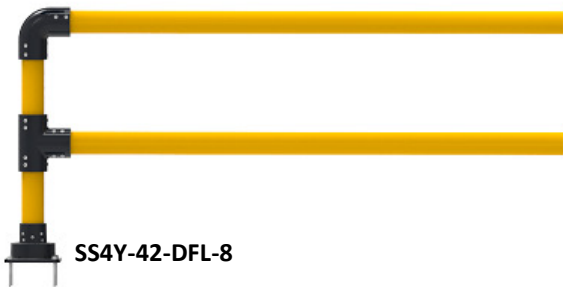

SS4Y-42-DFL-8

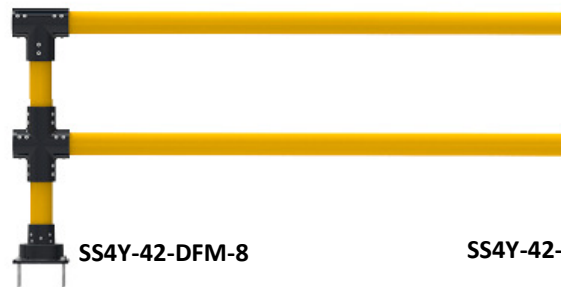

SS4Y-42-DFM-8



SS4Y-42-DFR

- 42" Tall Railing Sections
- Easy connect set screw installation
- Mix and match needed lengths
- Field customizable cut for odd lengths

- Patented Rebounding Steel Construction
- Temperature Rating: -40°F
- Pipe Coating: Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat



SLOWSTOP SYSTEMS
GUARDING LLC

4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved. 01/19/2017