





SlowStop® 4" Modular FlexRail (SS4Y-GRS)

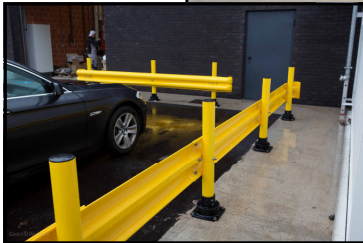

MASS (LBS)	2500	5000	7500	10000	15000	20000	25000	40000	80000
SPEED (MPH)									
1.0									
2.0									
3.0									
4.0									
5.0									
6.0									
7.0									
8.0									
9.0									
10.0									
11.0									
12.0									

No / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is Under-Sized

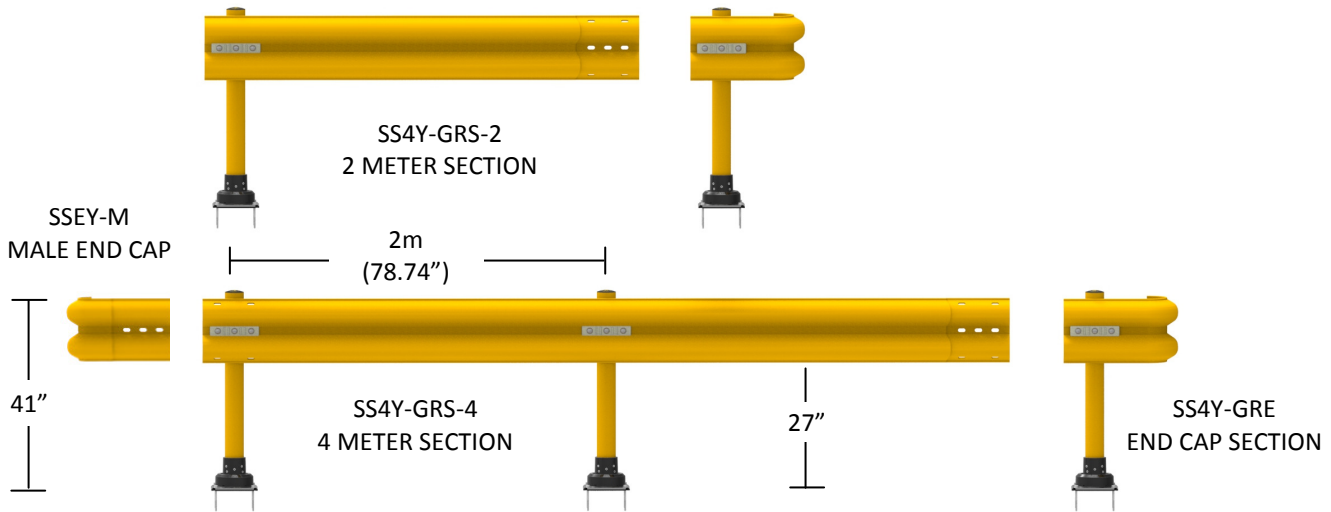

SPECIFICATIONS

- Includes 4" SlowStop Bollards—42" tall
- Rail Break Strength: 24,780 lbf
- Stopping Power Rating 24,785 Joules—Rail Impact
- Max deflection: 28" at break
- Temperature Rating: -40°F to 240°F
- Traffic Yellow (RAL 1023) Throughout
- No bending equipment required for curves (16' min. radius)
- Custom Heights Available

RECOMMENDED USES

- Industrial Equipment Protection
- Pedestrian Aisle Ways
- Utility Guarding
- Access Denial
- Parking Perimeters



4955 Stout Dr. • San Antonio, TX 78219
 210-736-4477 • 800-736-5256 • Fax 210-734-6448
 Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
 ©2017 SlowStop. All rights reserved.