




SlowStop® Rebounding Bollard – 5” (SS5Y-42)

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 5.56” (5” ANSI Schedule 40)
Height: 42”


Set Screws: 6 M16 x 2.00
8mm Hex

Cap: Black Plastic

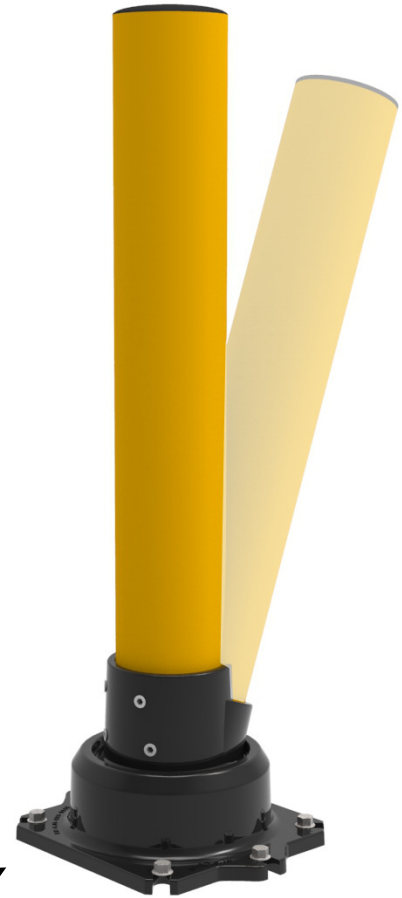

MASS (LBS)	5000	7500	10000	15000	20000	25000	30000	40000	80000
SPEED (MPH)									
1.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
1.5	Green	Green	Green	Green	Green	Green	Green	Green	Yellow
2.0	Green	Green	Green	Green	Green	Green	Green	Yellow	Red
2.5	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow	Red
3.0	Green	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red
3.5	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red
4.0	Green	Green	Yellow	Yellow	Red	Red	Red	Red	Red
4.5	Green	Green	Yellow	Yellow	Red	Red	Red	Red	Red
5.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
5.5	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
6.0	Yellow	Yellow	Red	Red	Red	Red	Red	Red	Red
6.5	Yellow	Red	Red	Red	Red	Red	Red	Red	Red
7.0	Yellow	Red	Red	Red	Red	Red	Red	Red	Red

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized



Installs with six (6) 5/8” x 5-1/2”
Concrete Screw Anchors

SPECIFICATIONS

- Stopping Power: 14,000 joules / 10,326 ft-lb.
- No Damage Rating: 7,000 joules / 5,163 ft-lb.
- Impact Force: 9,429 pounds @ 36” height
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized +
60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated

RECOMMENDED USES

- Heavy Duty
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved.