




SlowStop® 6" Modular FlexRail (SS6Y-GRS)



MASS (LBS)	2500	5000	7500	10000	15000	20000	25000	40000	80000
SPEED (MPH)									
1.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
2.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
5.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
6.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
7.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
8.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
9.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
10.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
11.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
12.0	Green	Green	Green	Green	Green	Green	Green	Green	Green

No / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is Under-Sized

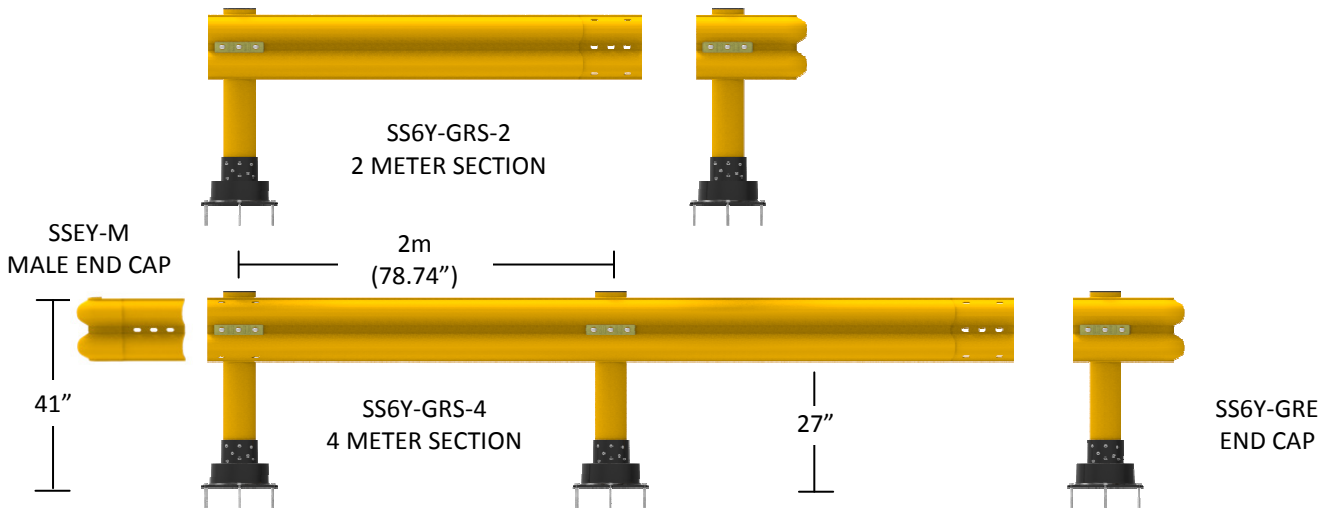

SPECIFICATIONS

- Includes 6" SlowStop Bollards—42" tall
- Rail Break Strength: 24,780 lbf
- Stopping Power Rating 35,391 Joules—90° Rail Impact
- Max deflection: 85cm at break
- Temperature Rating: -40°C to 115°C
- Traffic Yellow (RAL 1023) Throughout
- No bending equipment required for curves (16' min. radius)
- Custom Heights Available

RECOMMENDED USES

- Heavy Industrial Equipment Protection
- Loading Bays
- Utility Guarding
- Access Denial
- Parking Perimeters



4955 Stout Dr. • San Antonio, TX 78219
 210-736-4477 • 800-736-5256 • Fax 210-734-6448
 Email: info@slowstop.com
www.slowstop.com

