




SlowStop® Rebounding Bollard – 5” (SS5Y-42-PT)

Meets IBC 1607.7.3 for loading of 6,000 pounds static force at 18”.

Meets FBC 1607.7.3 for loading of 6,000 pounds static force at 27”.

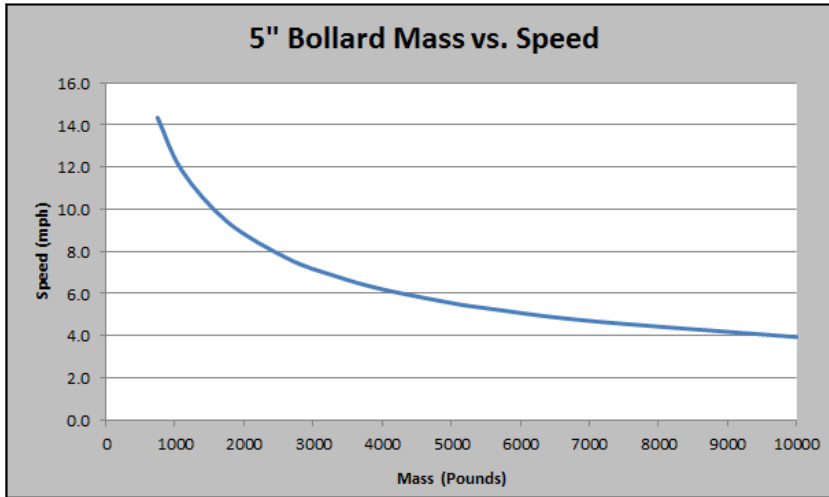

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 5.56" (5" ANSI Schedule 40)
Height: 42"

Set Screws: 6 M16 x 2.00
8mm Hex

Cap: Black Plastic

Six 5/8" PTANCHORS

SPECIFICATIONS

- Energy Absorption: 7,000 joules / 5,163 ft-lb.
- Load Resistance: 9,429 pounds @ 36" height
12,567 pounds @ 27" height
18,850 pounds @ 18" height
- Temperature Rating: -40°
- Pipe Coating: Galvanized, Polyester Outdoor Powder Coat
- Cast Iron Coating: E-Coat, Powder, CSI Rated

RECOMMENDED USES

- Heavy Duty
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes and Vehicle Barriers
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@impactrecovery.com
www.slowstop.com

