




SlowStop® IronFlex 4" Horseshoe Bollard (SS4Y-28-HS-36)

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4" (3.5" ANSI Schedule 40 or Equiv.)
Height: 28"
Width: 36"


Set Screws: M16 x 2.00mm Hex

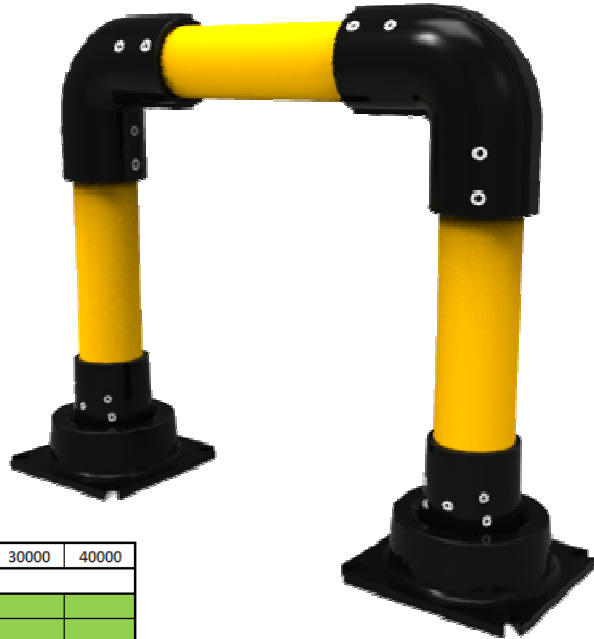

MASS (LBS)	1000	2000	3000	4000	5000	10000	15000	20000	30000	40000
SPEED (MPH)										
1	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
1.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
2.5	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
3	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
4	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
5	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
6	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
7	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
8	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
9	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
10	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
11	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
12	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized

Installs with eight (8)
5/8" x 5-1/2"
Concrete Anchor Screws



SPECIFICATIONS

- Energy Absorption: 5,334 joules / 3,934ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized + 60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated

RECOMMENDED USES

- Fuel Pump Protection
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Column Protection
- Access Denial
- Post-tensioned Concrete
- Not for K-Rated Security Use



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved.